




# Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax  
Stevensville: 406-777-3466 | 406-777-7181 Fax  
Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	CL/150 PART #	CL/200 PART#
4"	4.8	5.5	6.5	HD3494FM150DIPS	HD3494FM200DIPS
6"	6.9	6.5	7.75	HD3496FM150DIPS	HD3496FM200DIPS
8"	9.05	7	8.75	HD3498FM150DIPS	HD3498FM200DIPS
10"	11.1	7.25	9.5	HD34910FM150DIPS	HD34910FM200DIPS
12"	13.2	7.75	10.5	HD34912FM150DIPS	HD34912FM200DIPS
14"	15.3	8.5	11.75	HD34914FM150DIPS	HD34914FM200DIPS
16"	17.4	9	12.5	HD34916FM150DIPS	HD34916FM200DIPS
18"	19.5	9.75	13.75	HD34918FM150DIPS	HD34918FM200DIPS
20"	21.6	9.75	14.25	HD34920FM150DIPS	HD34920FM200DIPS
24"	25.8	9.75	15.25	HD34924FM150DIPS	HD34924FM200DIPS

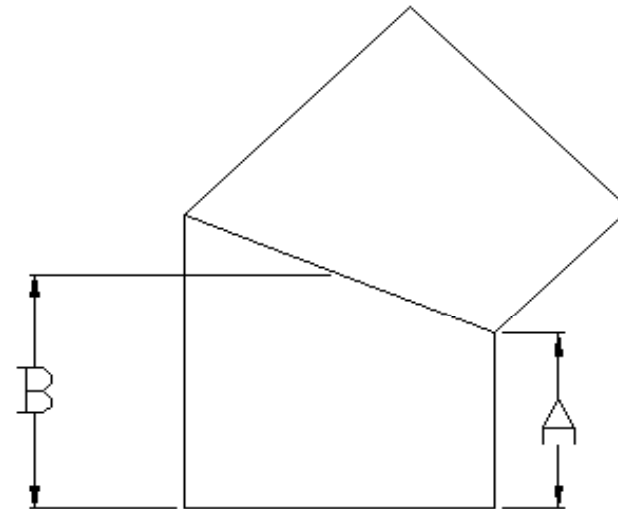

Description: DIPS HDPE 2 PC 45 DEGREE ELBOW PLAIN-ENDS  
Material: HDPE  
Size: 4" - 24"  
CLASS 150, CLASS 200  
PSI RATINGS 150, 200

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge. FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.