




Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax
Stevensville: 406-777-3466 | 406-777-7181 Fax
Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
4"	4.8	5.5	7	HD2594FM150DIPS	HD2594FM200DIPS
6"	6.9	6.5	8.5	HD2596FM150DIPS	HD2596FM200DIPS
8"	9.05	7	9.5	HD2598FM150DIPS	HD2598FM200DIPS
10"	11.1	7	10.25	HD25910FM150DIPS	HD25910FM200DIPS
12"	13.2	7.75	11.5	HD25912FM150DIPS	HD25912FM200DIPS
14"	15.3	8.5	12.75	HD25914FM150DIPS	HD25914FM200DIPS
16"	17.4	9	14	HD25916FM150DIPS	HD25916FM200DIPS
18"	19.5	9.5	15	HD25918FM150DIPS	HD25918FM200DIPS
20"	21.6	9.75	15.75	HD25920FM150DIPS	HD25920FM200DIPS
24"	25.8	10	17.5	HD25924FM150DIPS	HD25924FM200DIPS

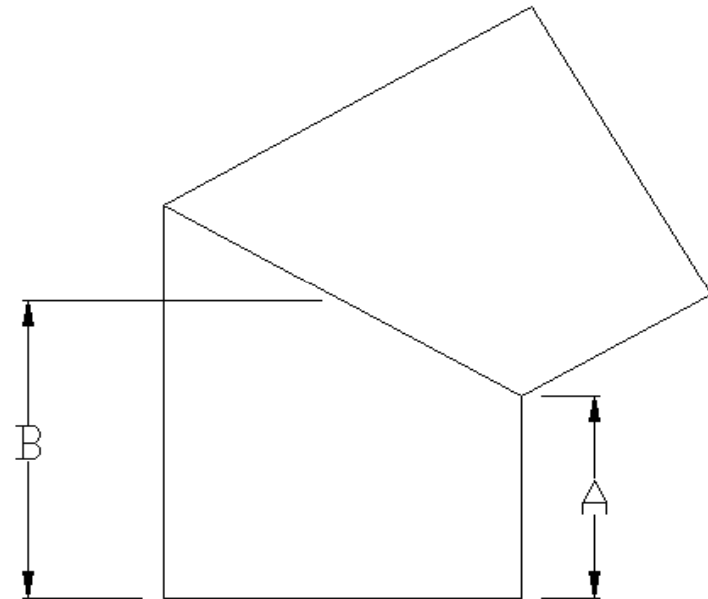

Description: DIPS HDPE 2 PC. 60 DEGREE ELBOW PLAIN-ENDS
Material: HDPE
Size: 4" - 24"
CLASS 150, CLASS 200
PSI RATINGS 150, 200

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM CATALOG