



# Specified Fittings, LLC


164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax  
 Stevensville: 406-777-3466 | 406-777-7181 Fax  
 Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	CL/150 PART #
4"	4.8	15.5	7.75	HD8204FM150DIPS
6"	6.9	21	10.5	HD8206FM150DIPS
8"	9.05	23.5	11.75	HD8208FM150DIPS
10"	11.1	26.25	13.25	HD82010FM150DIPS
12"	13.2	31.25	15.75	HD82012FM150DIPS
14"	15.3	32.5	16.25	HD82014FM150DIPS
16"	17.4	34.5	17.25	HD82016FM150DIPS
18"	19.5	36.5	18.25	HD82018FM150DIPS
20"	21.6	38.5	19.25	HD82020FM150DIPS
24"	25.8	44	22	HD82024FM150DIPS

SIZE	OD	A	B	CL/200 PART #
4"	4.8	15.5	7.75	HD8204FM200DIPS
6"	6.9	21	10.5	HD8206FM200DIPS
8"	9.05	23.5	11.75	HD8208FM200DIPS
10"	11.1	26.25	13.25	HD82010FM200DIPS
12"	13.2	31.25	15.75	HD82012FM200DIPS
14"	15.3	32.5	16.25	HD82014FM200DIPS
16"	17.4	34.5	17.25	HD82016FM200DIPS
18"	19.5	36.5	18.25	HD82018FM200DIPS
20"	21.6	38.5	19.25	HD82020FM200DIPS
24"	25.8	56	28	HD82024FM200DIPS

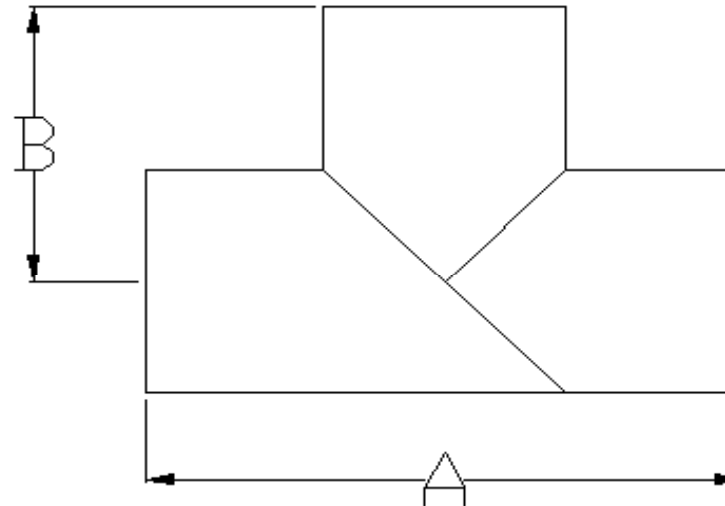

Description: DIPS HDPE FABRICATED TEE  
 PLAIN-ENDS  
 Material: HDPE  
 Size: 4"-24"  
 CLASS 150, CLASS 200  
 PSI RATING: 150, 200

Version 1.3, Copyright 2013

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge. FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.