


SPECIFIED FITTINGS, LLC

164 W. SMITH RD
 BELLINGHAM, WA 98226
 888-734-8846 (T)
 888-734-8258 (F)
spec@specfit.com

483 STEVENSVILLE AIRPORT RD.
 STEVENSVILLE, MT 59870
 406-777-3466 (T)
 406-777-7181 (F)
sales@specfit.com

www.specfit.com

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
4"	4.8	6	11	HD3694FM150DIPS	HD3694FM200DIPS
6"	6.9	6	13.5	HD3696FM150DIPS	HD3696FM200DIPS
8"	9.05	6.5	15.5	HD3698FM150DIPS	HD3698FM200DIPS
10"	11.1	6.5	16.75	HD36910FM150DIPS	HD36910FM200DIPS
12"	13.2	8	19.25	HD36912FM150DIPS	HD36912FM200DIPS
14"	15.3	8	21	HD36914FM150DIPS	HD36914FM200DIPS
16"	17.4	8	24.5	HD36916FM150DIPS	HD36916FM200DIPS
18"	19.5	8	25.5	HD36918FM150DIPS	HD36918FM200DIPS
20"	21.6	8	26.5	HD36920FM150DIPS	HD36920FM200DIPS
24"	25.8	10	30.75	HD36924FM150DIPS	HD36924FM200DIPS

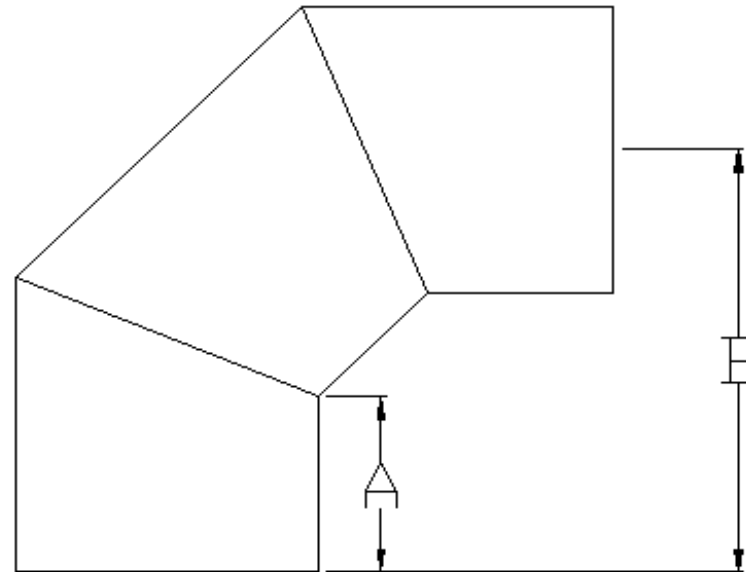

Description: DIPS HDPE 3 PC 90 DEGREE ELBOW
 PLAIN-ENDS
 Material: HDPE
 Size: 4" - 24"
 CLASS 150, CLASS 200
 PSI RATING 150, 200

Version 1.5, Copyright 2017

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.
 FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.