


SPECIFIED FITTINGS, INC

**164 W. SMITH RD
BELLINGHAM, WA 98226
888-734-8846 (T)
888-734-8258 (F)
spec@specfit.com**

**483 STEVENSVILLE AIRPORT RD.
STEVENSVILLE, MT 59870
406-777-3466 (T)
406-777-7181 (F)
sales@specfit.com**

www.specfit.com

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
4"	4.8	6	16	HD3704FM150DIPS	HD3704FM200DIPS
6"	6.9	6	21	HD3706FM150DIPS	HD3706FM200DIPS
8"	9.05	6.5	24	HD3708FM150DIPS	HD3708FM200DIPS
10"	11.1	6.5	25.25	HD37010FM150DIPS	HD37010FM200DIPS
12"	13.2	8	27.75	HD37012FM150DIPS	HD37012FM200DIPS
14"	15.3	8	30.75	HD37014FM150DIPS	HD37014FM200DIPS
16"	17.4	8	38.75	HD37016FM150DIPS	HD37016FM200DIPS
18"	19.5	8	40	HD37018FM150DIPS	HD37018FM200DIPS
20"	21.6	8	41	HD37020FM150DIPS	HD37020FM200DIPS
24"	25.8	10	45	HD37024FM150DIPS	HD37024FM200DIPS

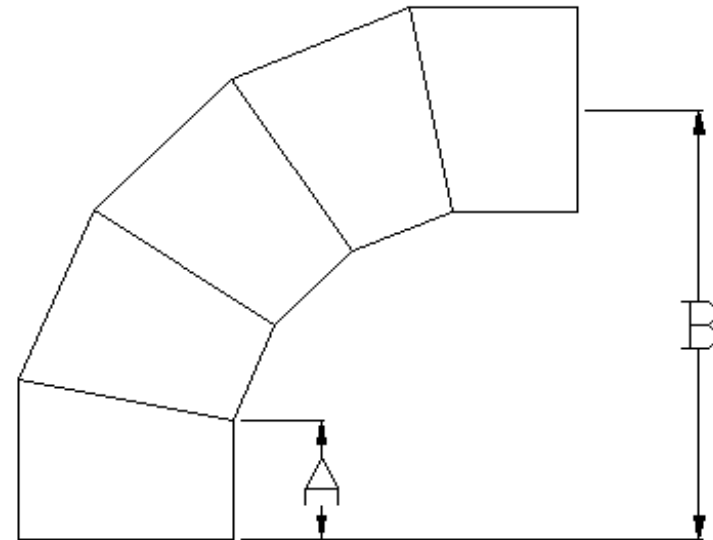

Description: DIPS HDPE 5 PC 90 DEGREE ELBOW
PLAIN-ENDS
Material: HDPE
Size: 4" - 24"
CLASS 150, CLASS 200
PSI RATINGS 150, 200

Version 1.5, Copyright 2017

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.