


SPECIFIED FITTINGS, LLC

164 W. SMITH RD
 BELLINGHAM, WA 98226
 888-734-8846 (T)
 888-734-8258 (F)
spec@specfit.com

483 STEVENSVILLE AIRPORT RD.
 STEVENSVILLE, MT 59870
 406-777-3466 (T)
 406-777-7181 (F)
sales@specfit.com

www.specfit.com

SIZE	OD	A	B	R	CL/150 PART #	CL/200 PART #
4"	4.8	6	9.6	13.5	HD7834FM150DIPS	HD7834FM200DIPS
6"	6.9	7	12.3	19.9	HD7836FM150DIPS	HD7836FM200DIPS
8"	9.05	10	16.6	24.5	HD7838FM150DIPS	HD7838FM200DIPS
10"	11.1	11	19.6	32.25	HD78310FM150DIPS	HD78310FM200DIPS
12"	13.2	13	23.3	38.3	HD78312FM150DIPS	HD78312FM200DIPS
14"	15.3	13	23.4	38.9	HD78314FM150DIPS	HD78314FM200DIPS

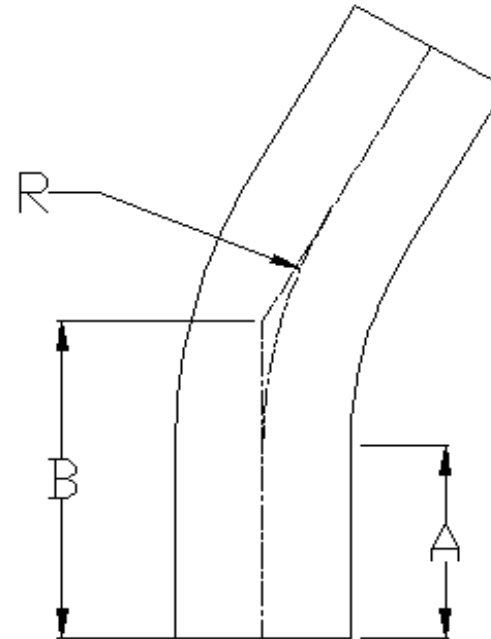

Description: DIPS HDPE 30 DEGREE
 SWEEP PLAIN-ENDS
 Material: HDPE
 Size: 4"-14"
 CLASS 150, CLASS 200
 PSI RATINGS 150, 200

Version 1.5, Copyright 2017

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.