




Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax
Stevensville: 406-777-3466 | 406-777-7181 Fax
Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
2"	2.375	5	11.75	HD3602FM150	HD3602FM200
3"	3.5	5	12.25	HD3603FM150	HD3603FM200
4"	4.5	5.75	13.75	HD3604FM150	HD3604FM200
5"	5.563	5.75	14.25	HD3605FM150	HD3605FM200
6"	6.625	6.5	16	HD3606FM150	HD3606FM200
8"	8.625	7.25	19.5	HD3608FM150	HD3608FM200
10"	10.75	7.25	21	HD36010FM150	HD36010FM200
12"	12.75	8	23	HD36012FM150	HD36012FM200
14"	14	9	25.5	HD36014FM150	HD36014FM200
16"	16	9.5	27.5	HD36016FM150	HD36016FM200
18"	18	9.5	29.25	HD36018FM150	HD36018FM200
20"	20	10.25	32.75	HD36020FM150	HD36020FM200
24"	24	10.75	36	HD36024FM150	HD36024FM200

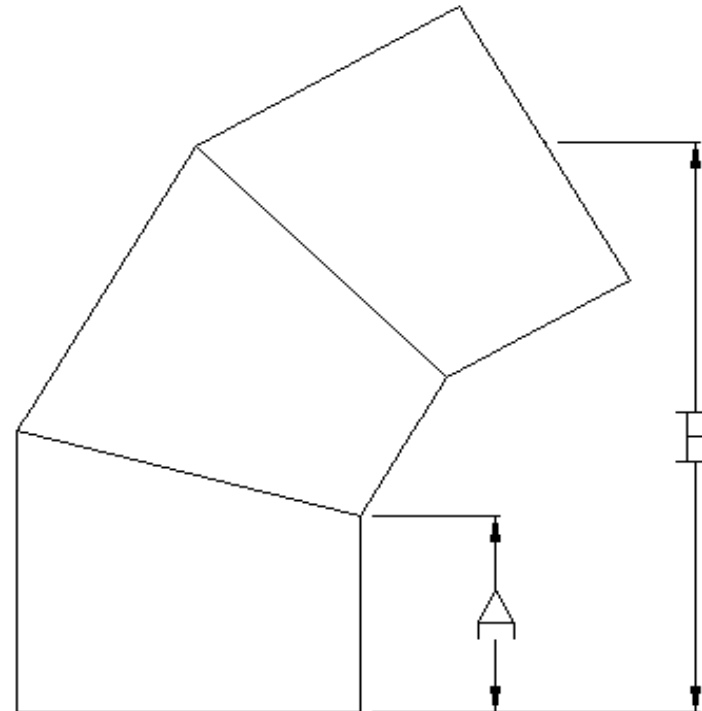

Description: IPS HDPE 3 PC 60 DEGREE ELBOW PLAIN-ENDS

Material: HDPE

Size: 2" - 24"
CLASS 150, CLASS 200

PSI RATINGS 150, 200

Version 1.3, Copyright 2013

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge. FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.