




Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax
 Stevensville: 406-777-3466 | 406-777-7181 Fax
 Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	C	CL/150 PART #	CL/200 PART #
4"	4.8	29.5	21.75	6.5	HD9204FM150DIPS	HD9204FM200DIPS
6"	6.9	36.5	28.25	6.75	HD9206FM150DIPS	HD9206FM200DIPS
8"	9.05	39.5	31	6.75	HD9208FM150DIPS	HD9208FM200DIPS
10"	11.1	42	33	6.75	HD92010FM150DIPS	HD92010FM200DIPS
12"	13.2	46.75	35.75	8.25	HD92012FM150DIPS	HD92012FM200DIPS
14"	15.3	49.75	38.25	8.5	HD92014FM150DIPS	HD92014FM200DIPS
16"	17.4	59	44.75	10.5	HD92016FM150DIPS	HD92016FM200DIPS
18"	19.5	64.75	50.25	10.5	HD92018FM150DIPS	HD92018FM200DIPS
20"	21.6	76.25	60.75	11	HD92020FM150DIPS	HD92020FM200DIPS
24"	25.8	82.25	65.75	11	HD92024FM150DIPS	HD92024FM200DIPS

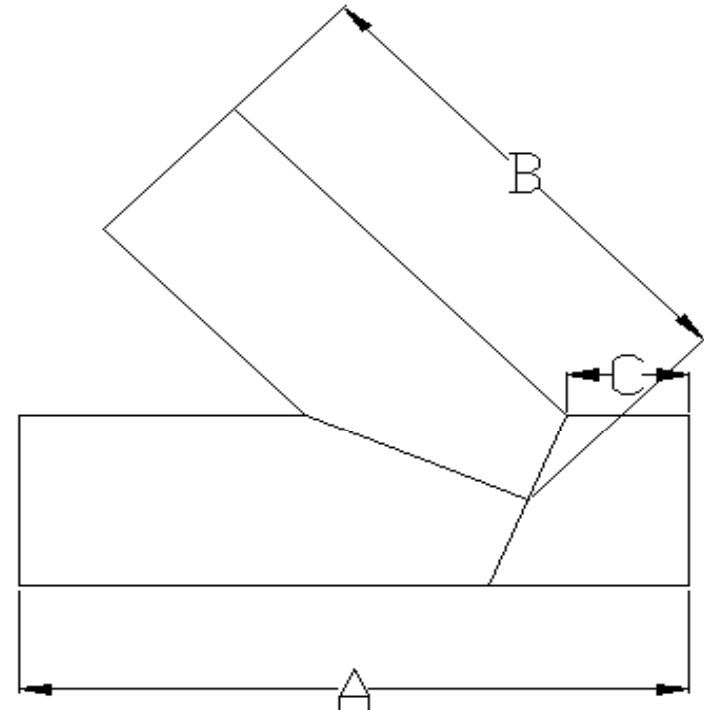

Description: DIPS HDPE FABRICATED WYE
 PLAIN-ENDS
 Material: HDPE
 Size: 4"-24"
 CLASS 150, CLASS 200
 PSI RATINGS 150, 200

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.
 FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.