



# Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com


Bellingham: 360-398-7700 | 360-398-7051 Fax

Stevensville: 406-777-3466 | 406-777-7181 Fax

Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	A	B	R	CL/150 PART #	CL/200 PART #
2"	2.375	4.5	14	9.5	HD7862FM150	HD7862FM200
3"	3.5	4.5	18.5	14	HD7863FM150	HD7863FM200
4"	4.5	5	23	18	HD7864FM150	HD7864FM200
6"	6.625	7	26.9	19.9	HD7866FM150	HD7866FM200
8"	8.625	10	34.5	24.5	HD7868FM150	HD7868FM200
10"	10.75	11	43.25	32.25	HD78610FM150	HD78610FM200
12"	12.75	13	51.3	38.3	HD78612FM150	HD78612FM200
14"	14	13	51.9	38.9	HD78614FM150	HD78614FM200

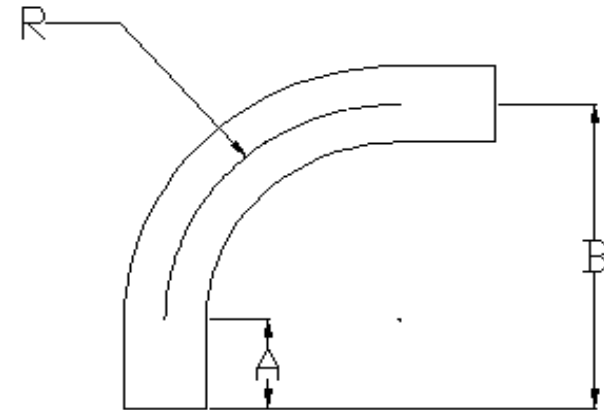

Description: IPS HDPE 90 DEGREE SWEEP  
PLAIN-ENDS

Material: HDPE

Size: 2"-14"  
CLASS 150, CLASS 200

PSI RATINGS 150, 200

Version 1.3, Copyright 2013

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61.

Other OD's, SDR's and Pressure Ratings available upon request.

Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.