


SPECIFIED FITTINGS, LLC

164 W. SMITH RD
 BELLINGHAM, WA 98226
 888-734-8846 (T)
 888-734-8258 (F)
spec@specfit.com

483 STEVENSVILLE AIRPORT RD.
 STEVENSVILLE, MT 59870
 406-777-3466 (T)
 406-777-7181 (F)
sales@specfit.com

www.specfit.com

SIZE	A	B	L	PRESSURE	
				CLASS	PART #
8X6	4.37	4.5	11.62	150	MHD60086FM150
8X6	4.37	4.5	11.62	200	MHD60086FM200
6X4	4.12	4.12	11.5	150	MHD60064FM150
6X4	3	3	8	200	MHD60064FM200
4X3	3.12	3	7.88	150	MHD60043FM150
4X3	3	3	6.88	200	MHD60043FM200
4X2	3.06	2.81	7.75	150	MHD60042FM150
4X2	3	2.88	7.38	200	MHD60042FM200
3X2	3.12	2.81	8	150	MHD60032FM150
3X2	2.94	3	6.88	200	MHD60032FM200

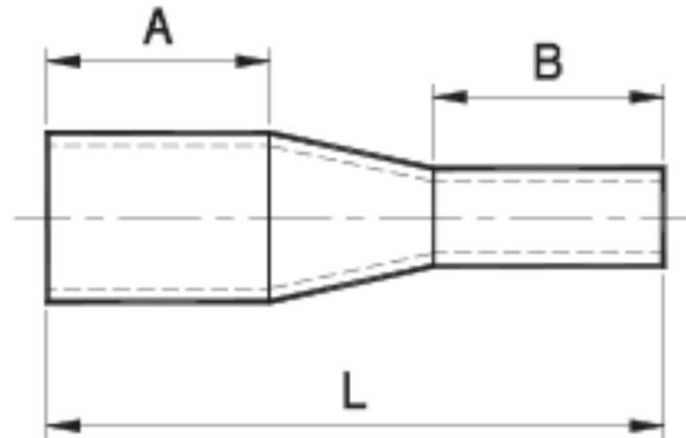

Description: IPS HDPE MOLDED
 CONCENTRIC REDUCERS
 PLAIN ENDS
 Material: HDPE
 Size: 2"-8"
 CLASS 150, CLASS 200
 PSI RATINGS 150, 200

NOTE:
 Molded fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.
 FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.