


SPECIFIED FITTINGS, LLC

**164 W. SMITH RD
BELLINGHAM, WA 98226
888-734-8846 (T)
888-734-8258 (F)
spec@specfit.com**

**483 STEVENSVILLE AIRPORT RD.
STEVENSVILLE, MT 59870
406-777-3466 (T)
406-777-7181 (F)
sales@specfit.com**

www.specfit.com

SIZE	OD	A	B	R	CL/150 PART #	CL/200 PART #
2"	2.375	6	7.9	7.13	HD7832FM150	HD7832FM200
3"	3.5	6	8.8	10.5	HD7833FM150	HD7833FM200
4"	4.5	6	9.6	13.5	HD7834FM150	HD7834FM200
6"	6.625	7	12.3	19.9	HD7836FM150	HD7836FM200
8"	8.625	10	16.6	24.5	HD7838FM150	HD7838FM200
10"	10.75	11	19.6	32.25	HD78310FM150	HD78310FM200
12"	12.75	13	23.3	38.3	HD78312FM150	HD78312FM200
14"	14	13	23.4	38.9	HD78314FM150	HD78314FM200

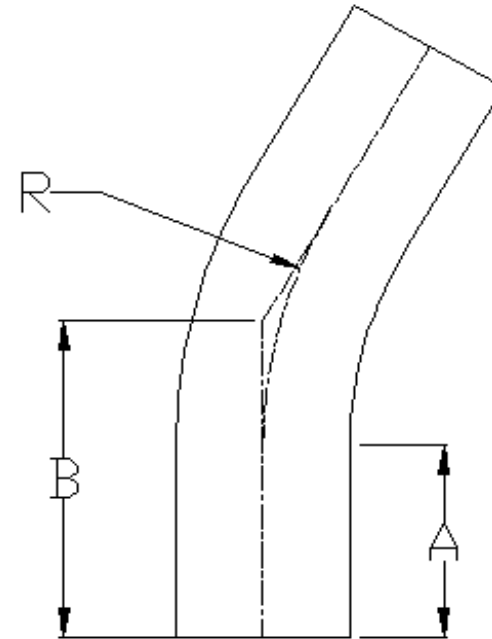

Description: IPS HDPE 30 DEGREE SWEEP
PLAIN-ENDS
Material: HDPE
Size: 2"-14"
CLASS 150, CLASS 200
PSI RATINGS 150, 200

Version 1.5, Copyright 2017

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.
FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.