


# SPECIFIED FITTINGS, LLC

164 W. SMITH RD  
 BELLINGHAM, WA 98226  
 888-734-8846 (T)  
 888-734-8258 (F)  
[spec@specfit.com](mailto:spec@specfit.com)

483 STEVENSVILLE AIRPORT RD.  
 STEVENSVILLE, MT 59870  
 406-777-3466 (T)  
 406-777-7181 (F)  
[sales@specfit.com](mailto:sales@specfit.com)

[www.specfit.com](http://www.specfit.com)

SIZE	OD	A	B	C	CL/150 PART #	CL/200 PART #
2"	2.375	23	17	5.75	HD9202FM150	HD9202FM200
3"	3.5	24.5	18.25	5.5	HD9203FM150	HD9203FM200
4"	4.5	29	21.5	6.75	HD9204FM150	HD9204FM200
5"	5.563	34.5	26.75	6.75	HD9205FM150	HD9205FM200
6"	6.625	36	28	6.75	HD9206FM150	HD9206FM200
8"	8.625	39	30.5	6.75	HD9208FM150	HD9208FM200
10"	10.75	41.75	32.75	6.75	HD92010FM150	HD92010FM200
12"	12.75	46.25	35	8.5	HD92012FM150	HD92012FM200
14"	14	48.25	36.5	8.75	HD92014FM150	HD92014FM200
16"	16	57.25	43	11	HD92016FM150	HD92016FM200
18"	18	63	48.5	10.75	HD92018FM150	HD92018FM200
20"	20	74.25	58.75	11.25	HD92020FM150	HD92020FM200
24"	24	80	63.75	11.5	HD92024FM150	HD92024FM200

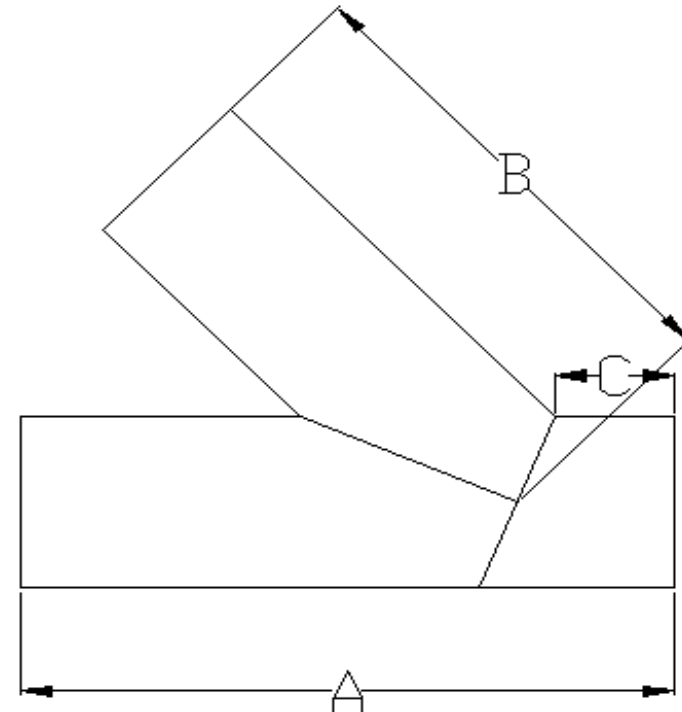

Description: IPS HDPE FABRICATED WYE  
 PLAIN-ENDS  
 Material: HDPE  
 Size: 2"-24"  
 CLASS 150, CLASS 200  
 PSI RATINGS 150, 200

**NOTE:**

Molded fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.  
 FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.