




## SPECIFIED FITTINGS, LLC

**164 W. SMITH RD  
BELLINGHAM, WA 98226  
888-734-8846 (T)  
888-734-8258 (F)  
[spec@specfit.com](mailto:spec@specfit.com)**

**483 STEVENSVILLE AIRPORT RD.  
STEVENSVILLE, MT 59870  
406-777-3466 (T)  
406-777-7181 (F)  
[sales@specfit.com](mailto:sales@specfit.com)**

[www.specfit.com](http://www.specfit.com)

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
3"	3.5	4	4.25	HD3303FM150	HD3303FM200
4"	4.5	6	6.5	HD3304FM150	HD3304FM200
5"	5.563	6	6.5	HD3305FM150	HD3305FM200
6"	6.625	6	6.75	HD3306FM150	HD3306FM200
8"	8.625	6.5	7.25	HD3308FM150	HD3308FM200
10"	10.75	6.5	7.5	HD33010FM150	HD33010FM200
12"	12.75	8	9.25	HD33012FM150	HD33012FM200
14"	14	8	9.5	HD33014FM150	HD33014FM200
16"	16	8	9.5	HD33016FM150	HD33016FM200
18"	18	8	9.75	HD33018FM150	HD33018FM200
20"	20	8	10	HD33020FM150	HD33020FM200
24"	24	10	12.5	HD33024FM150	HD33024FM200

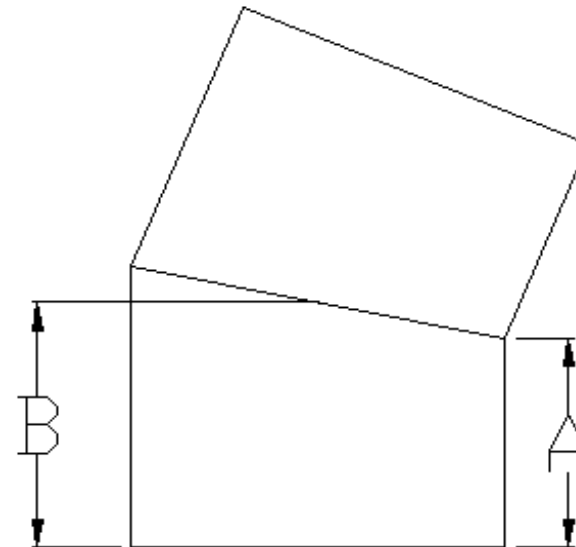

**Description:** IPS HDPE 2 PC 22.5 DEGREE  
ELBOW PLAIN-ENDS  
**Material:** HDPE  
**Size:** 3" - 24"  
CLASS 150, CLASS 200  
**PSI RATINGS** 150, 200

Version 1.5, Copyright 2017

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.