




SPECIFIED FITTINGS, LLC

164 W. SMITH RD
 BELLINGHAM, WA 98226
 888-734-8846 (T)
 888-734-8258 (F)
spec@specfit.com

483 STEVENSVILLE AIRPORT RD.
 STEVENSVILLE, MT 59870
 406-777-3466 (T)
 406-777-7181 (F)
sales@specfit.com

www.specfit.com

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
3"	3.5	4	7.25	HD3603FM150	HD3603FM200
4"	4.5	6	9.5	HD3604FM150	HD3604FM200
5"	5.563	6	9.75	HD3605FM150	HD3605FM200
6"	6.625	6	10	HD3606FM150	HD3606FM200
8"	8.625	6.5	12.25	HD3608FM150	HD3608FM200
10"	10.75	6.5	13.25	HD36010FM150	HD36010FM200
12"	12.75	8	15.5	HD36012FM150	HD36012FM200
14"	14	8	16	HD36014FM150	HD36014FM200
16"	16	8	17	HD36016FM150	HD36016FM200
18"	18	8	19.5	HD36018FM150	HD36018FM200
20"	20	8	20	HD36020FM150	HD36020FM200
24"	24	10	23.25	HD36024FM150	HD36024FM200

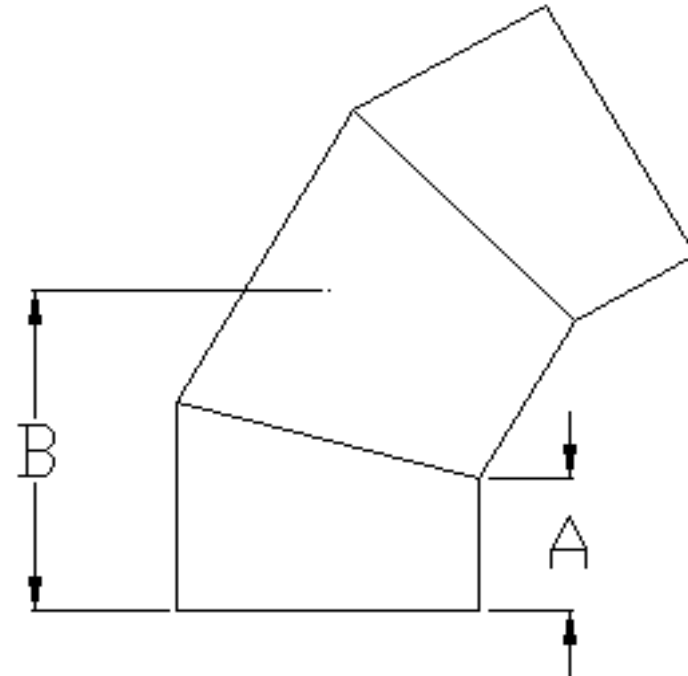

Description: IPS HDPE 3 PC 60 DEGREE
 ELBOW PLAIN-ENDS
 Material: HDPE
 Size: 3" - 24"
 CLASS 150, CLASS 200
 PSI RATINGS 150, 200

Version 1.5, Copyright 2017

NOTE:

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.