




## SPECIFIED FITTINGS, LLC

164 W. SMITH RD  
 BELLINGHAM, WA 98226  
 888-734-8846 (T)  
 888-734-8258 (F)  
[spec@specfit.com](mailto:spec@specfit.com)

483 STEVENSVILLE AIRPORT RD.  
 STEVENSVILLE, MT 59870  
 406-777-3466 (T)  
 406-777-7181 (F)  
[sales@specfit.com](mailto:sales@specfit.com)

[www.specfit.com](http://www.specfit.com)

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
3"	3.5	4	13.25	HD3703FM150	HD3703FM200
4"	4.5	6	15.75	HD3704FM150	HD3704FM200
5"	5.563	6	16.25	HD3705FM150	HD3705FM200
6"	6.625	6	16.75	HD3706FM150	HD3706FM200
8"	8.625	6.5	22.5	HD3708FM150	HD3708FM200
10"	10.75	6.5	24.5	HD37010FM150	HD37010FM200
12"	12.75	8	27.5	HD37012FM150	HD37012FM200
14"	14	8	29	HD37014FM150	HD37014FM200
16"	16	8	31	HD37016FM150	HD37016FM200
18"	18	8	39.25	HD37018FM150	HD37018FM200
20"	20	8	40.25	HD37020FM150	HD37020FM200
24"	24	10	44.25	HD37024FM150	HD37024FM200

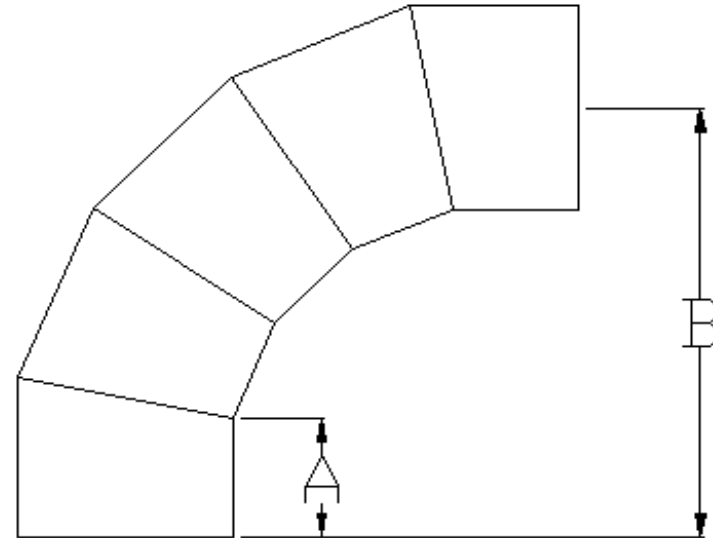

Description: IPS HDPE 5 PC 90 DEGREE ELBOW  
 PLAIN-ENDS  
 Material: HDPE  
 Size: 3" - 24"  
 CLASS 150, CLASS 200  
 PSI RATINGS 150, 200

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge. FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.