




# Specified Fittings, LLC

164 West Smith Road • PO Box 28157 • Bellingham, WA 98228-0157 | Email: sales@specfit.com

Bellingham: 360-398-7700 | 360-398-7051 Fax  
Stevensville: 406-777-3466 | 406-777-7181 Fax  
Mexico (Toll Free): 800-429-1705 | 800-574-1075 Fax



SIZE	OD	L	PRESSURE	
			CLASS	PART #
2"	2.375	4.25	150	MHD1902FM150
2"	2.375	4.25	200	MHD1902FM200
3"	3.5	3.94	150	MHD1903FM150
3"	3.5	4.8	200	MHD1903FM200
4"	4.5	4.25	150	MHD1904FM150
4"	4.5	8.5	200	MHD1904FM200
6"	6.625	5.2	150	MHD1906FM150
6"	6.625	9.88	200	MHD1906FM200
8"	8.625	5	150	MHD1908FM150
8"	8.625	5	200	MHD1908FM200

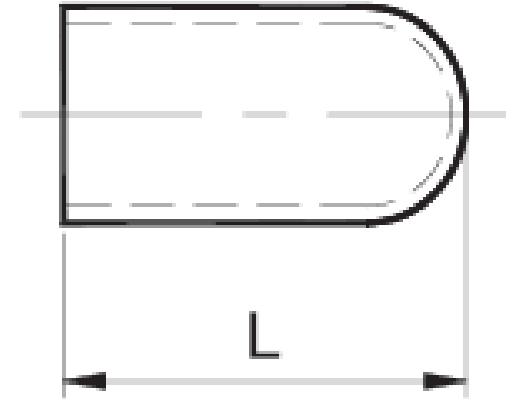

Description: IPS HDPE MOLDED CAPS  
PLAIN-ENDS

Material: HDPE

Size: 2" - 8"  
CLASS 150, CLASS 200

PSI RATINGS 150, 200

**NOTE:**

Molded fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge. FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.