


## SPECIFIED FITTINGS, LLC

164 W. SMITH RD  
 BELLINGHAM, WA 98226  
 888-734-8846 (T)  
 888-734-8258 (F)  
[spec@specfit.com](mailto:spec@specfit.com)

483 STEVENSVILLE AIRPORT RD.  
 STEVENSVILLE, MT 59870  
 406-777-3466 (T)  
 406-777-7181 (F)  
[sales@specfit.com](mailto:sales@specfit.com)

[www.specfit.com](http://www.specfit.com)

SIZE	OD	A	B	CL/150 PART #	CL/200 PART #
3"	3.5	13.5	6.75	HD8203FM150	HD8203FM200
4"	4.5	15.5	7.75	HD8204FM150	HD8204FM200
5"	5.563	17	8.5	HD8205FM150	HD8205FM200
6"	6.625	21	10.5	HD8206FM150	HD8206FM200
8"	8.625	23.5	11.75	HD8208FM150	HD8208FM200
10"	10.75	26.25	13.25	HD82010FM150	HD82010FM200
12"	12.75	31.25	15.75	HD82012FM150	HD82012FM200
14"	14	32.5	16.25	HD82014FM150	HD82014FM200
16"	16	34.5	17.25	HD82016FM150	HD82016FM200
18"	18	36.5	18.25	HD82018FM150	HD82018FM200
20"	20	38.5	19.25	HD82020FM150	HD82020FM200
24"	24	44	22	HD82024FM150	
24"	24	56	28		HD82024FM200

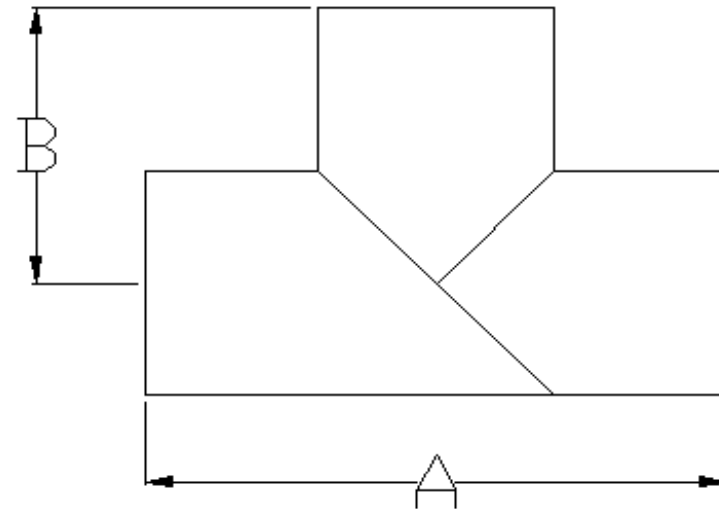

Description: IPS HDPE FABRICATED TEE  
 PLAIN-ENDS  
 Material: HDPE  
 Size: 3"-24"  
 CLASS 150, CLASS 200  
 PSI RATINGS 150, 200

**NOTE:**

Fittings are manufactured and tested to the requirements of ASTM D3035, D3261, AWWA C901 or C906, and FM 1613. These fittings are tested to the requirements of ASTM D3261 and are compatible for heat fusion with any pipe and or fitting of compatible resin. Made from PE3408/3608 or PE4710 material. All raw material shall comply with NSF-61. Other OD's, SDR's and Pressure Ratings available upon request. Per FM 1613 and AWWA C906, the working pressure rating equals the pressure class with an allowance included in the WPR for pressure surge.

FOR DISCLAIMER REFER TO FM DIMENSION CATALOG.